


Safety switch with separate actuator

AZ 16

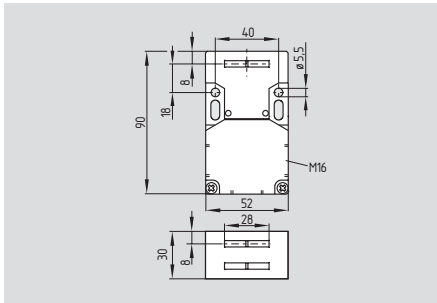

- Thermoplastic enclosure
- Multiple coding
- Individual coding available on request
- Long life
- Double insulated
- 3 cable entries M16 x 1.5
- Large wiring compartment
- High level of contact reliability with low voltages and currents
- Not sensitive to dirty conditions by virtue of patented roller system
- Available with LED
- Slotted holes for adjustment, circular holes for location
- AS-Interface Safety at Work available, see chapter 5

Technical data

Standards: IEC/EN 60947-5-1
BG-GS-ET-15

Enclosure: glass-fibre reinforced thermoplastic, self-extinguishing

Actuator: stainless steel 1.4301

Protection class: IP 67 to EN 60529

Contact material: silver

Contact type: change-over contact with double break, type Zb or 2 NC or 3 NC contacts, with galvanically separated contact bridges

Switching system: \ominus IEC 60947-5-1
slow action, NC contact with positive break

Connection: screw terminals

Cable section: max. 2.5 mm² (incl. conductor ferrules)

Cable entry: 3 x M16 x 1.5

U_{imp} : 6 kV

U_i : 500 V

I_{the} : 10 A

Utilisation category: AC-15, DC-13

I_e/U_e : 4 A / 230 VAC
4 A / 24 VDC

Max. fuse rating: 6 A gG D-fuse

Positive break travel: 8 mm

Positive break force: 10 N for each NC contact fitted


Ambient temperature: - 30 °C ... + 80 °C

Mechanical life: > 1 million operations

Latching force: 30 N for ordering suffix r

Contact variants


1 NO / 1 NC




2 NC




3 NC



1 NO / 2 NC




with individual coding




Connector

1 NO / 1 NC



2 NC



Approvals




Ordering details

AZ16-①zv②k-③-④-⑤

No.	Replace	Description
①		1 NO / 1 NC
	02	2 NC
	03	3 NC
	12	1 NO / 2 NC
②	r	Ejection force 30 N
	G24	With LED
		Cable entry M 16
	M20	Cable entry M 20
	ST	Connector M12 x 1 bottom
	STL	Connector M12 x 1 left
	STR	Connector M12 x 1 right
⑤	2254	Latching force 5 N
	1762	Front mounting
	1637	Gold-plated contacts

Note



LED version:


Ordering suffix G24, only available for version with one NO and one NC contact. Protected against incorrect polarity and voltage spikes.

Note

Actuators must be ordered separately.


Safety switch with separate actuator

System components

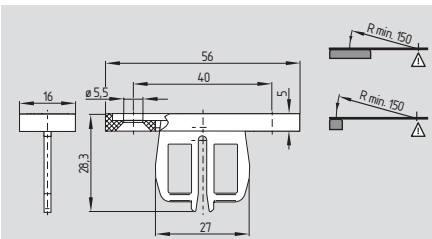


Straight actuator AZ 15/16-B1

System components

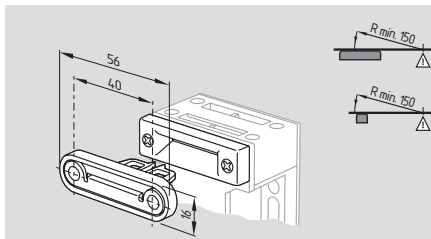


AZ 15/16-B1-2177 with centering guide


System components

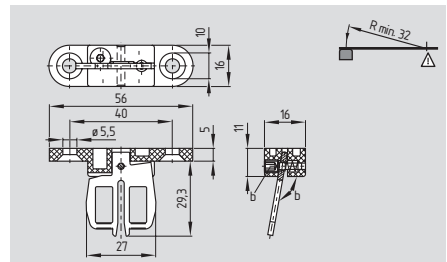


Flexible actuator AZ 15/16-B3

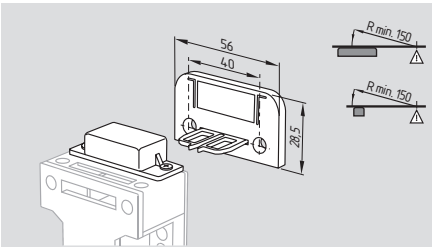


AZ 15/16-B1-1747 with magnetic latch

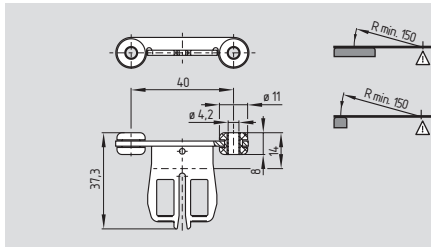


AZ 15/16-B1-2245 with rubber mounting

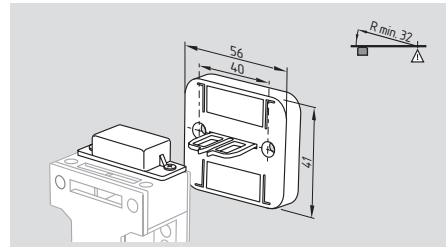


AZ 15/16-B3-1747 with magnetic latch

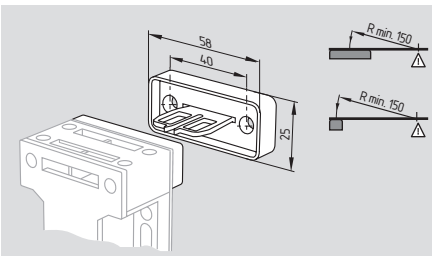


AZ 15/16-B1-2024 with slot lip-seal

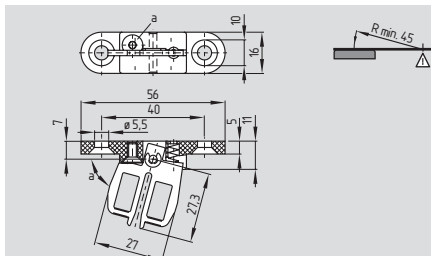


Flexible actuator AZ 15/16-B2

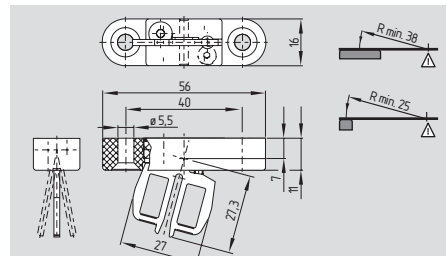


Flexible actuator AZ 15/16-B6

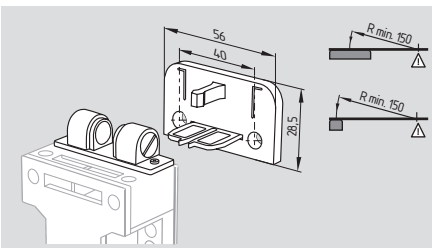

AZ 15/16-B1-2053 with ball latch

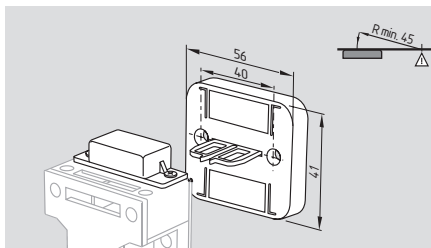

AZ 15/16-B2-1747 with magnetic latch

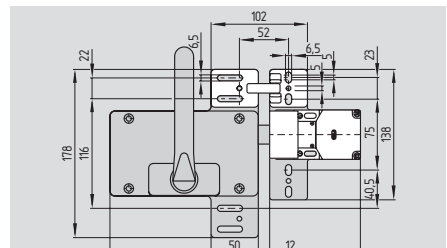

Actuator AZ 16-ST330

Ordering details

Straight actuator
with magnetic latch
with slot lip-seal
with ball latch

AZ 15/16-B1
AZ 15/16-B1-1747
AZ 15/16-B1-2024
AZ 15/16-B1-2053

Straight actuator
with centering guide
with rubber mounting
Flexible actuator
with magnetic latch

AZ 15/16-B1-2177
AZ 15/16-B1-2245
AZ 15/16-B2
AZ 15/16-B2-1747

Ordering details

Flexible actuator
with magnetic latch
Flexible actuator


AZ 15/16-B3
AZ 15/16-B3-1747
AZ 15/16-B6

Actuator with or without
emergency handle
A detailed product description
can be found on page 1-11.

AZ 16-ST330


Safety switch with separate actuator

System components




Mounting set MS AZ 15/16

System components




Front mounting AZ 15/16 -1762



Lockout tag SZ 16/335




Connector plug M 12 x 1



Slot sealing plug AZ 15/16-1476



Connector plug M 12 x 1 (with cable)



Ball catch 2053-2



Tamperproof screws

Ordering details

Mounting set	MS AZ 15/16 P
	MS AZ 15/16 R/P
Lockout tag	SZ 16/335
Slot sealing plug	AZ 15/16-1476
Ball catch	-2053-2

Ordering details

Front mounting with M5 nuts	-1762
Connector plug M 12 x 1	
without cable	1093038
with cable	1148412
Tamperproof screws with unidirectional slots	
M5 x 12	1135338
M5 x 16	1135339
M5 x 20	1135340
(Quantity 2 pcs)	